


# Relay-Unit Lupus

*Your tough security*

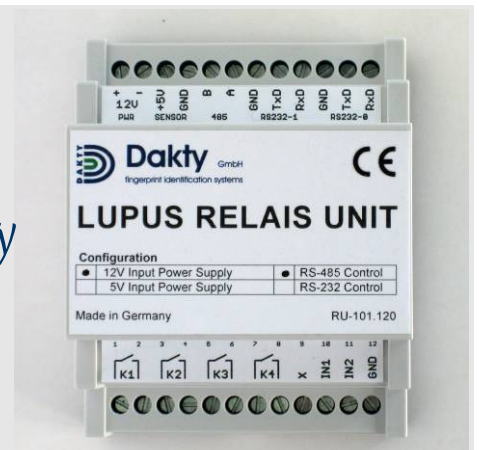

Features	Relay and supply unit, DIN rail, for up to four access points. Control over RS485 or RS232,
Application	Stationary indoor use. Used mainly in access control and everywhere serial commanded 4 contacts are used. Placed usually in the electricity meter cupboard.
Compatibility	To Dakty Fingerprint Orion
Case	DIN rail, plastic ABS
Color	Gray, RAL 7035
Dimension	71 mm x 90 mm x 70 mm
Power Supply	12 V DC or 5 V DC from the Orion Control Unit
Output Power	5 V DC max. 0.5 A
Input Power	About 2 W with connected Fingerprint Orion
Interfaces	RS485 / RS232
Outputs	4 Relay potential free, max 5 A, max 230 V, free configurable
Relay Time	1 to 99 s, independent for each relay.
Inputs	2 Optocouplers
Temperature	0°C to +40°C (32°F to 104°F)
Storage Temperature	-20°C to +85°C (-4°F to 185°F)
Article Nr.	RU 101